


SPP 4" SPP-18 Výkonové křivky



Přehled výkonů

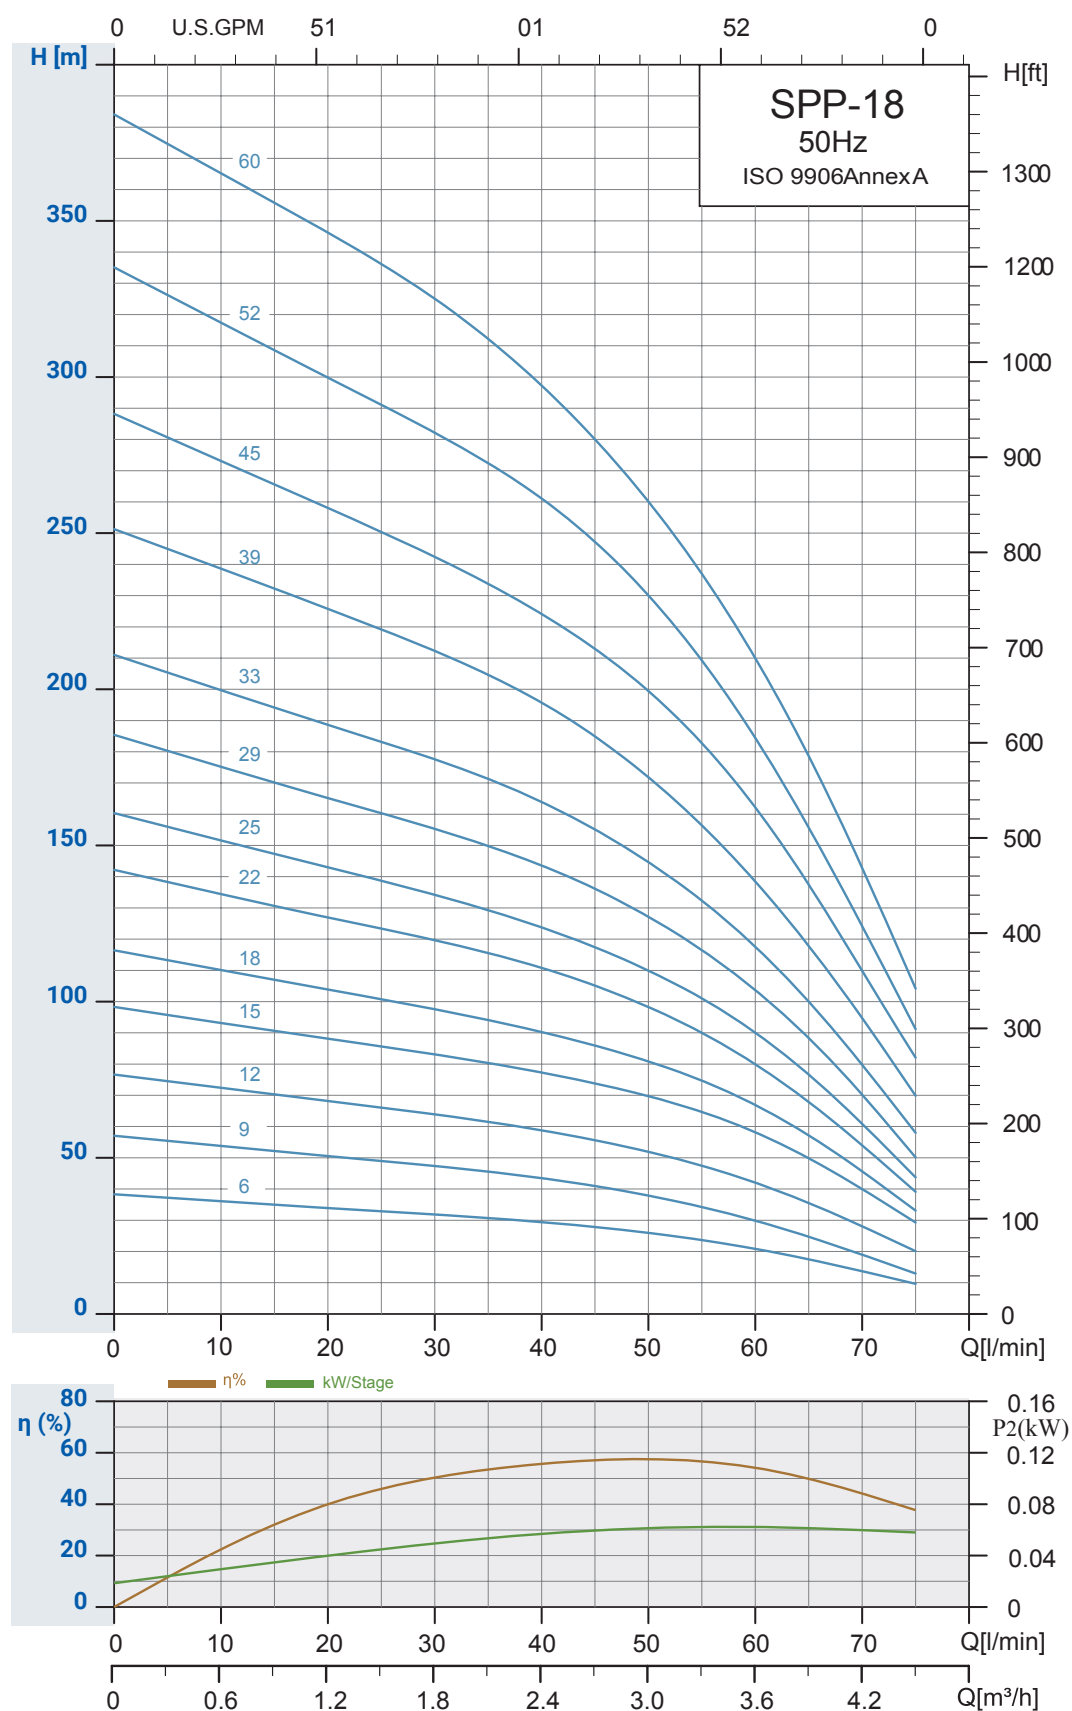


Typ čerpadla	Kw	HP	Průtok Q 2850 r/min								
			l/min 0	25	30	35	40	45	50	60	70
			m³/h 0	1.5	1.8	2.1	2.4	2.7	3.0	3.6	4.2
H = CELKOVÝ VÝTLAK V METRECH											
SPP-1806	0.37	0.5	38	33	32	31	30	28	26	21	14
SPP-1809	0.55	0.75	57	49	47	46	43	41	38	30	19
SPP-1812	0.75	1	77	66	64	62	58	56	52	42	28
SPP-1815	1.1	1.5	97	85	83	80	77	74	69	57	40
SPP-1818	1.1	1.5	116	101	97	94	90	85	80	67	45
SPP-1822	1.5	2	142	123	120	115	110	105	98	80	54
SPP-1825	1.5	2	160	139	134	129	123	117	110	90	61
SPP-1829	2.2	3	185	160	155	150	143	136	127	103	70
SPP-1833	2.2	3	211	183	177	171	164	155	145	118	80
SPP-1839	3	4	251	219	212	205	196	185	172	138	95
SPP-1845	3	4	288	250	242	234	224	213	199	162	110
SPP-1852	4	5.5	334	291	282	272	261	247	230	184	124
SPP-1860	4	5.5	384	336	325	312	297	280	260	210	143

Na vyžádání jsou k dispozici čerpadla s vyšším tlakem až do 60 stupňů.

Rozměry a hmotnosti



Typ čerpadla	Rozměry (mm)		Hmotnost (kg)
	A	C	Čerpadlo
SPP-1806	293	98	2.4
SPP-1809	356	98	3.0
SPP-1812	419	98	3.6
SPP-1815	482	98	4.2
SPP-1818	545	98	4.7
SPP-1822	629	98	5.5
SPP-1825	692	98	6.1
SPP-1829	776	98	6.8
SPP-1833	883	98	9.7
SPP-1839	1009	98	11.2
SPP-1845	1135	98	12.7
SPP-1852	1282	98	14.5
SPP-1860	1450	98	16.6

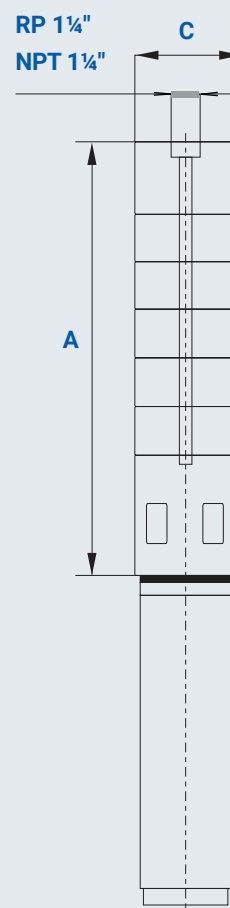

C = Maximální průměr čerpadla včetně krytu kabelu a motoru