




AKS-SW

GARDEN SUBMERSIBLE PUMP

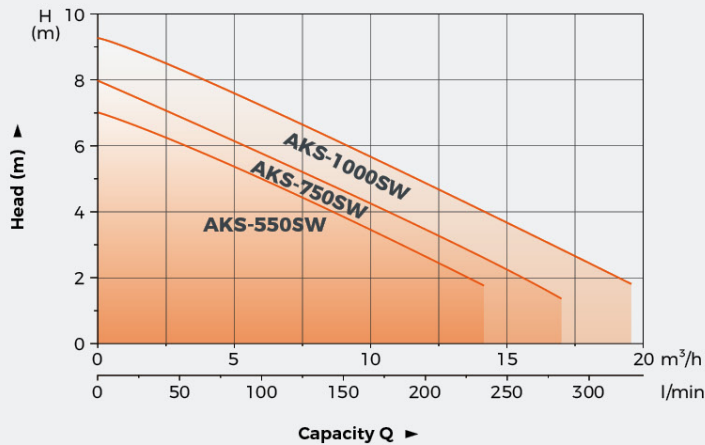

Features

Suitable for pumping dirty water containing particles with maximum diameter up to 35mm. Float switch ensures automatic start and stop. Motor with thermal protector.

Application

Can be used for transfer dirty water or other liquids similar to water in physical and chemical properties. Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement.

Model	AKS-550SW	AKS-750SW	AKS-1000SW
Rated Power	550 W	750 W	1000 W
Max. Head	7 m	8 m	9 m
Max. Flow	13.5 m ³ /h	16.5 m ³ /h	19.5 m ³ /h
Max. Depth of immersion	7m	7 m	7 m
Max. Dia of Particle	35 mm	35 mm	35 mm
Outlet	1 1/2"	1 1/2"	1 1/2"
Power Cable Type	H05RN-F	H07RN-F	H07RN-F
Length of Power Cable	10 m	10 m	10 m
Protection Class	IPX8	IPX8	IPX8
Max. liquid Temperature	35 °C	35 °C	35 °C
Qty in carton box	4 pcs	4 pcs	4 pcs
Package Dimension	440x350x410mm	440x350x410mm	440x350x410mm
Package Gross Weight	25.3 kg	26.7 kg	28.5 kg
Qty/20'GP	1120	1120	1120
Automatic function	Float Switch	Float Switch	Float Switch